

CBM

LIGHTING



ABOUT US

CBM Electronic Lighting always listens to the needs of its customers in order to offer the lighting products that best respond to the latest market trends.

We are a manufacturing business that specializes in high-efficiency lighting systems with low energy consumption. We offer a wide array of water, dust and humidity proof LED lighting products.

Our products are manufactured in North America with great care to meet the needs of our customers and the requirements of all sectors of the agricultural and industrial building codes.

Our lighting systems are fully programmable and allow you to reproduce a natural daytime lighting cycle to optimize your energy efficiency.

Expertise and strict quality control are our core values.

All of our CBM Electronic Lighting representatives are anxious to help you decide which fixture is right for you. We will provide you with lighting lay-outs, cost and pay-back comparisons, and technical information. We want you to be sure you made the right decision by purchasing the best fixtures in the industry.





SCR-B-9W-DIM SCR-B-16W-DIM

Waterproof LED screwing bulb

| Housing | Model | Wattage | Dimmable | Lumen/ Watt | Total/ Lumen | Beam Spread | Color t° | Operating voltage |
|---------|-------|---------|----------|----------------|-----------------|----------------|-------------|----------------------|
| SCR | B | 9W | DIM | 140L/W | 1260 L | 220° | 2700K/5000K | 85/145-175/285 |
| SCR | B | 16W | DIM | 140L/W | 2240 L | 220° | 2700K/5000K | 85/145-175/285 |

Certification  



SQC-B-9W-DIM SQC-B-16W-DIM

| Housing | Model | Wattage | Dimmable | Lumen/ Watt | Total/ Lumen | Beam Spread | Color t° | Operating voltage |
|---------|-------|---------|----------|----------------|-----------------|----------------|-------------|----------------------|
| SQR | B | 9W | DIM | 140L/W | 1260 L | 220° | 2700K/5000K | 85/145-175/285 |
| SQR | B | 16W | DIM | 140L/W | 2240 L | 220° | 2700K/5000K | 85/145-175/285 |

Certification  



AWC/4/PB-230 LED-100/277V AWC/4/PB-430 LED-100/277V

| Housing | Model | Wattage | Beam spread | Total/ Lumen | Lumen/ Watt | Color T° | Operating voltage |
|------------|---------|---------|-------------|--------------|-------------|----------|-------------------|
| AWC | 4-PB230 | 30W | 140° | 4200 L | 140 L/W | 5000K | 120-277 |
| AWC | 4-PB430 | 30W | 140° | 4200 L | 140 L/W | 5000K | 120-277 |

Certification  



A AWC-118LED **B** AWC-218LED **C** AWC-318LED **D** AWC-418LED

| | Housing | Model | Wattage | Dimmable/ On-Off | Beam spread | Lumen/ Watt | Total/ Lumen | Color T° | Operating voltage |
|----------|------------|-------|---------|------------------|-------------|-------------|--------------|-------------|-------------------|
| A | AWC | 4' | 18W | ON/OFF, DIM | 120° | 140 L/W | 2520 L | 3000K-6500K | 120-277 |
| B | AWC | 4' | 36W | ON/OFF, DIM | 120° | 140 L/W | 5040 L | 3000K-6500K | 120-277 |
| C | AWC | 4' | 54W | ON/OFF, DIM | 120° | 140 L/W | 7560 L | 3000K-6500K | 120-277 |
| D | AWC | 8' | 72W | ON/OFF, DIM | 120° | 140 L/W | 10080 L | 3000K-6500K | 120-277 |

Certification  



HB/C80-150WLED-120/277

HB/C80-200WLED-120/277

| Housing | Model | Wattage | Dimmable | Lumen/Watt | Total/Lumen | Beam Spread | Color t° | Operating voltage |
|---------|-------|---------|-------------|------------|-------------|-------------|--------------|-------------------|
| HB | C80 | 150W | ON/OFF, DIM | 140L/W | 21000 L | 160° | 3000K, 5000K | 120-277 |
| HB | C80 | 200W | ON/OFF, DIM | 140L/W | 28000 L | 160° | 3000K, 5000K | 120-277 |

Certification  

- A** CM-SP-240-A-OO-65
- B** CM-FL-240-A-OO-65
- C** CM-SP-320-A-OO-65
- D** CM-FL-320-A-OO-65



| | Housing | Model | Wattage | Lumen/watt | Total/Lumen | Dimmable/On-Off | Beam spread | Color T° | Operating voltage |
|----------|---------|-------|---------|------------|-------------|-----------------|-------------|--------------|-------------------|
| A | IP65 | SP | 240W | 140L/W | 33600 L | ON/OFF, DIM | 160° | 3000K, 5000K | 120-277 |
| B | IP65 | FL | 240W | 140L/W | 33600 L | ON/OFF, DIM | 160° | 3000K, 5000K | 120-277 |
| C | IP65 | SP | 320W | 140L/W | 44800 L | ON/OFF, DIM | 160° | 3000K, 5000K | 120-277 |
| D | IP65 | FL | 320W | 140L/W | 44800 L | ON/OFF, DIM | 160° | 3000K, 5000K | 120-277 |

Certification  

An ideal programmable-slave control for application such as agricultural building and in any application that needs dimming. This control offers considerable savings in both energy consumption and in maintenance costs.



DTD/I/PRO

2 independent programs, 1 programmable for each zone.

2 zones with 1000 watts/zone.

2 each – 8 dusk to dawn settings per day (up & down)

Input Voltage: 120 vac, 220 vac or 240 vac (dedicated voltage) 50/60 HZ

2 Output: 120 or 230 vac (1000 watts)

Bypass function key

Display of current time, day, and light intensity

Trim pot low end adjustment



HB67-418LED-100/277V

HB67-618LED-100/277V

| Housing | Model | Wattage | Lumen /watt | Total/ Lumen | Dimmable/ On-Off | Beam Spread | Color T° | Operating voltage |
|---------|----------|---------|-------------|--------------|------------------|-------------|--------------|-------------------|
| IP67 | HB67-418 | 72W | 140L/W | 10080 L | ON/OFF, DIM | 160° | 3000K, 6500K | 120-277 |
| IP67 | HB67-418 | 108W | 140L/W | 15120 L | ON/OFF, DIM | 160° | 3000K, 6500K | 120-277 |


Certification  



HB69/PB-430W-120/277V 5000K HB69/PB-630W-120/277V 5000K

| Housing | Model | # Tube and lenght | Wattage | Lumen/Watt | Total/Lumen | Dimmable/ On-Off | Beam spread | Color T° | Operating voltage |
|---------|----------|-------------------|---------|------------|-------------|------------------|-------------|----------|-------------------|
| IP69 | HB69 430 | 609 mm | 120W | 140L/W | 16800 L | ON/OFF, DIM | 160° | 5000K | 120-277 |
| IP69 | HB69 630 | 609 mm | 180W | 140L/W | 25200 L | ON/OFF, DIM | 160° | 5000K | 120-277 |

Certification  

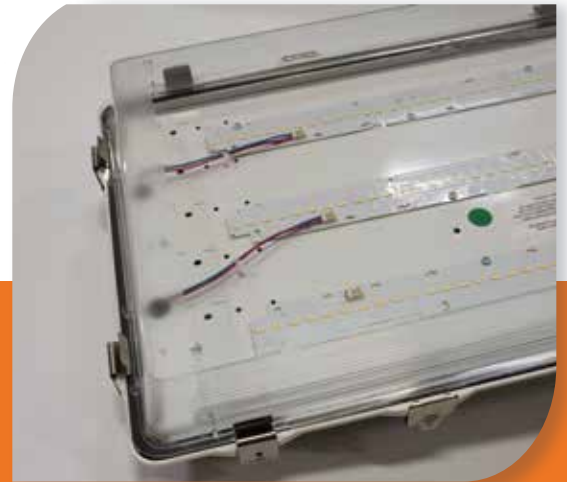

HB67/PB-430W-120/277V 5000K HB67/PB-630W-120/277V 5000K

| Housing | Model | # Tube and lenght | Wattage | Lumen/Watt | Total/Lumen | Dimmable/ On-Off | Beam spread | Color T° | Operating voltage |
|---------|-------|-------------------|---------|------------|-------------|------------------|-------------|----------|-------------------|
| IP67 | HB67 | 609 mm | 120W | 140L/W | 16800 L | ON/OFF, DIM | 160° | 5000K | 120-277 |
| IP67 | HB67 | 609 mm | 180W | 140L/W | 25200 L | ON/OFF, DIM | 160° | 5000K | 120-277 |

Certification  

TL6L-9W-DIM TL6L-18W-DIM



| Model | Wattage | Total/ Lumen | Lumen/ Watt | Beam spread | Dimmable/ On-Off | T° de color | Operating voltage |
|-------|---------|-----------------|----------------|----------------|---------------------|-------------------|----------------------|
| TL6L | 9W | 1260 L | 140L/W | 220° | DIM | 3000K/4000K/5000K | 85-145/175-285 |
| TL6L | 18W | 2520 L | 140L/W | 220° | DIM | 3000K/4000K/5000K | 85-145/175-285 |

Certification  



TL6HT-30W-DIM-DSV

Tube LED IP65 1800mm

| Model | Wattage | Total/ Lumen | Lumen/ Watt | Beam spread | Dimmable/ On-Off | Color T° | Operating voltage |
|-------|---------|-----------------|----------------|----------------|---------------------|-------------------|----------------------|
| HT | 30W | 4200 L | 140 L/W | 360° | DIM | 3000K/4000K/5000K | 85-145/175-285 |

Certification  



LED18W-DIM

Tube LED IP65 1200mm

| # Tube and lenght | Model/ Latch | Wattage | Dimmable/ On-off | Beam Spread | Color T° | Operating voltage |
|-------------------|--------------|---------|------------------|-------------|-------------------|-------------------|
| TL4 | STD | 18W | DIM | V | 3000K,4000K,5000K | 85/145-175/285 |

Certification  



LED20W-100/277V

Tube LED IP65 1200mm

| # Tube and lenght | Model/ Latch | Wattage | Dimmable/ On-off | Beam Spread | Color T° | Operating voltage |
|-------------------|--------------|---------|------------------|-------------|-------------------|-------------------|
| TL4 | STD | 20W | On-Off | V | 3000K,4000K,6500K | 120-277 |

Certification  



CBM LIGHTING REPRESENTATIVES

HEAD OFFICE

Office (450) 777-2848
Free 1 (866) 966-3431
Fax (450) 777-4872
info@cbmlighting.com
82, Irwin, Local 3,
Granby (QC) J2J 2P1

DELBERT STEEVES
USA  / CANADA   
Office (250) 549-5002
Cell (250) 808-0310
delsteev@telus.net
449, Middleton Way,
Coldstream (BC) V1B 3Z7

 **MARK KOLLASCH**
DESIGN FOR SWINE
(507) 236-3132
102, Hannes Street,
Silver Spring (MD) 20901
mark@design4swine.com

 **JASON DOE**
Cell (802) 355-9236
jdoe@globalsurf.net
Mountain View Dairy Equipment
3984, Berkshire Center Rd.
Enosburg Falls (VT) 05450

 **JIM HEHENBERGER**
Office (608) 544-2421
Cell (608) 963-9485
jandjsales@tds.net
J & J Sales
S9217, Slotty Rd.
Prairie du Sac (WI) 53578
jandjsalesonline.com

 **JIM BRITT**
Office (252) 566-6508
Cell (919) 920-5690
Fax (252) 566-5023
jim@briitt-tech.com
Britt Technical Services, Inc.
105, South Caswell Street, PO Box 411
LaGrange (NC) 28551

  **GLENDON HORST**
Cell (717) 552-3164
quiktricity@gmail.com
Quiktricity
5805, Marsh Rd.
Waynesboro (PA) 17268


 **JOSIAH GINGERICH**
(315) 775-6602
josiahtank21@aol.com
Gingerich's Industrial Suppliers
5071, W. Martinsburg Rd.
Lowville (NY) 13367

 **DAVID MARTEN**
Office (618) 658-0344
Fax (618) 253-7960
martenelectric@pcfreemail.com
Martens Electric
3805, Stoneface Rd.
Harrisburg (IL) 62946

 **DANA MARTIN**
Cell. (717) 582-2738
dana@martinent.net
Martin Enterprises
434, Briner Rd.
Elliottsburg (PA) 17024

 **RON MEYER**
(937) 441-6819
rmeyerr@nktelco.net
PO Box 232
Botkins (OH) 45306

 **RICHARD PEDERSON**
Office (320) 995-6403
Cell (320) 905-3725
richardpederson1245@gmail.com
Pederson Sales, Inc.
220, Schendel Street,
South Blomkest (MN) 56216

 **SAM STRAUB**
Office (231) 972-7380
Straub Agri Sales
12730, McKinley Rd.
Rodney (MI) 49342

 **DAVID ACEDO**
Office (480) 888-0173
Cell (320) 757-2594
Fax (480) 907-5989
doubleadairy@hotmail.com
Double A Dairy Service, LLC
3484, S. Greenfield Rd.
Gilbert (AZ) 85297



LIGHTING

www.cbmlighting.com

The logo for CBM Lighting. It features a stylized orange 'C' composed of radiating lines, followed by the letters 'BM' in a bold, dark blue sans-serif font. Below this, the word 'LIGHTING' is written in a smaller, grey sans-serif font.

CBM

LIGHTING



82, rue Irwin, local #3,
Granby (Québec) Canada J2J 2P1

www.cbmlighting.com

